



Part **II**
Selected
Product

STREET LIGHT

福州慧丰光电科技有限公司

FUZHOU HUIFENG LIGHTING TECHNOLOGY CO., LTD.

Add: No.6 Zhihui Avenue, High-tech Zone, Nanyu, Minhou, Fuzhou, China

Tel: +86-591-87912528 87916395

E-mail: huifeng@hflight.com

<http://www.hflight.com> <http://hflight.en.alibaba.com>





Solar Street Light

Daylight Control+Remote Control,Can be timed method
Simple and fast High-grade waterproof



Mode	Power	Size	Solar Panel Size	Battery Capacity	Voltage	CRI	Power Factor	IP Grade
HF-TY-030	50W	495*212*50mm	350*450*18mm	12000MA	3.2V	Ra>70	0.95	IP65
	100W	495*212*50mm	350*650*30mm	15000MA	6.4V			
	200W	495*212*50mm	430*670*30mm	18000MA	6.4V			
	300W	495*212*50mm	540*670*30mm	24000MA	6.4V			

HF-Solar SL
Series



SOLAR PANEL
INTEGRATION ALL IN ONE



Model	HF-Solar SL 60W	HF-Solar SL 90W	HF-Solar SL 120W	HF-Solar SL 180W	HF-Solar SL 240W	HF-Solar SL 300W
Solar Panel Power	8W	12W	18W	18W	25W	30W
Battery Capacity	10000MA	15000MA	20000MA	15000MA	20000MA	25000MA
Voltage:	3.2V			3.2V		
Luminous Flux	130LM/W			130LM/W		
Color Temperature	6500K			6500K		
CRI	>75			>75		
Operating Temperature	-40°C ~ 50°C			-40°C ~ 50°C		
Size(L*W*H)mm	520*230*60	630*245*60	730*250*60	447*342*70	597*342*70	677*342*70



HF-175MH
Series




HF-175MH-H



HF-175MH-H1

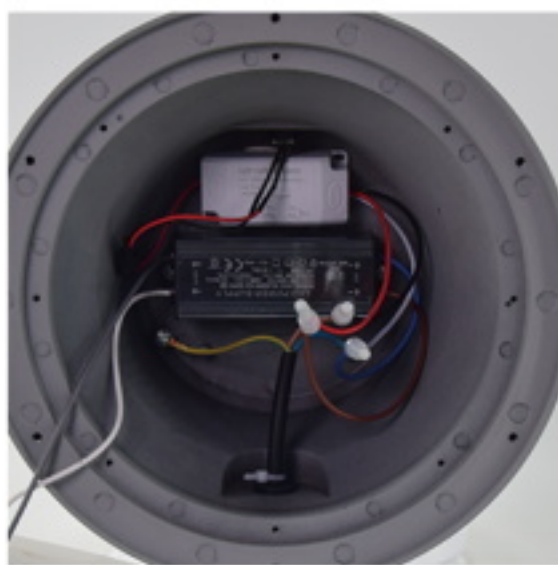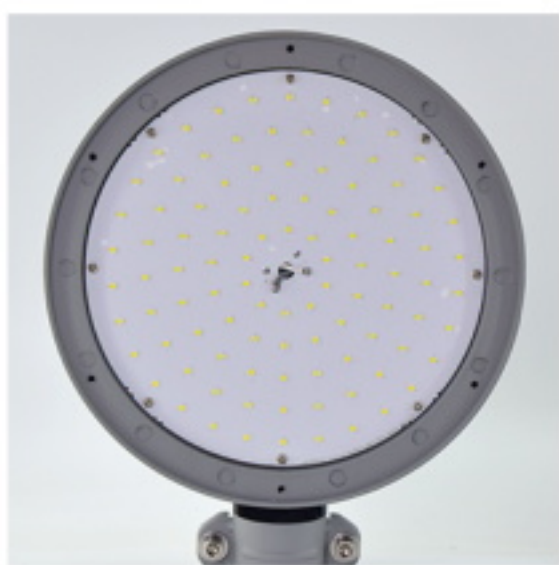

HF-175MH-SL

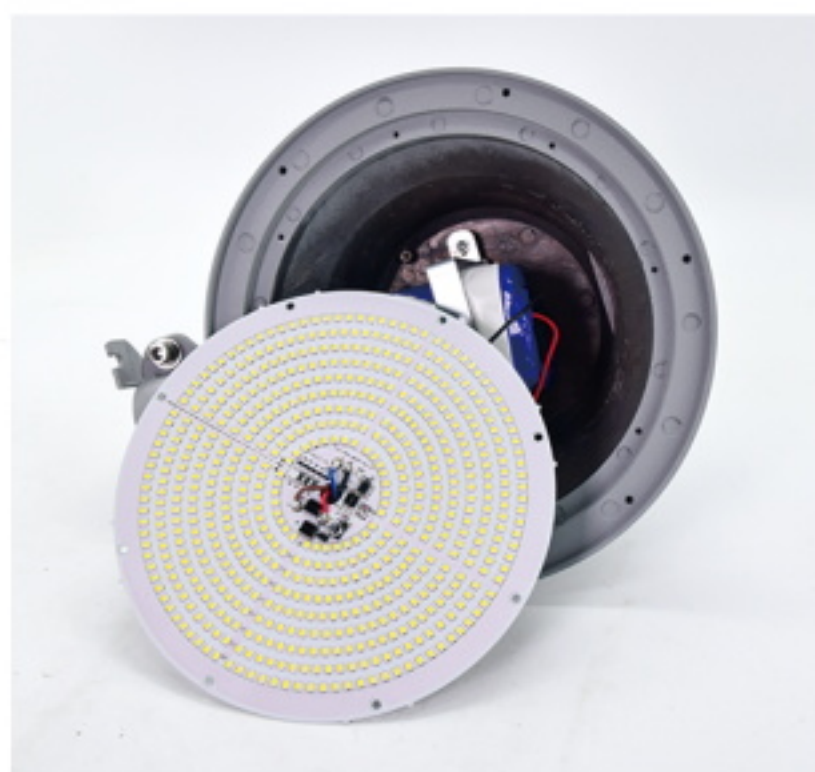

Mode	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-175MH-H	50W	295*243*170	110lm/w	170 °C	Ra>70	0.95	IP65
HF-175MH-H1	50W	295*243*160					
HF-175MH-H-LS	50W	295*243*160		130°C			




HF-66660 Series



200W

120W


60W

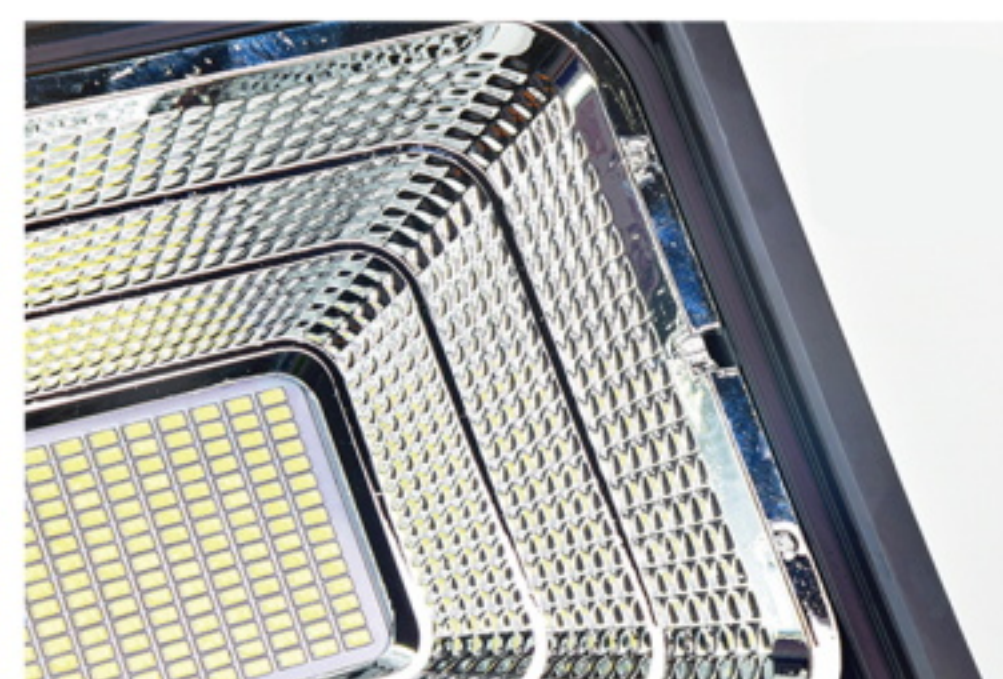

Mode	Power	Size(mm)	Luminous angle	CRI	Power Factor	IP Grade
HF-66660	60W	260*225*65	120°C	Ra>70	0.95	IP65
HF-66120	120W	310*270*75				
HF-66200	200W	343*310*80				



HF-175PM

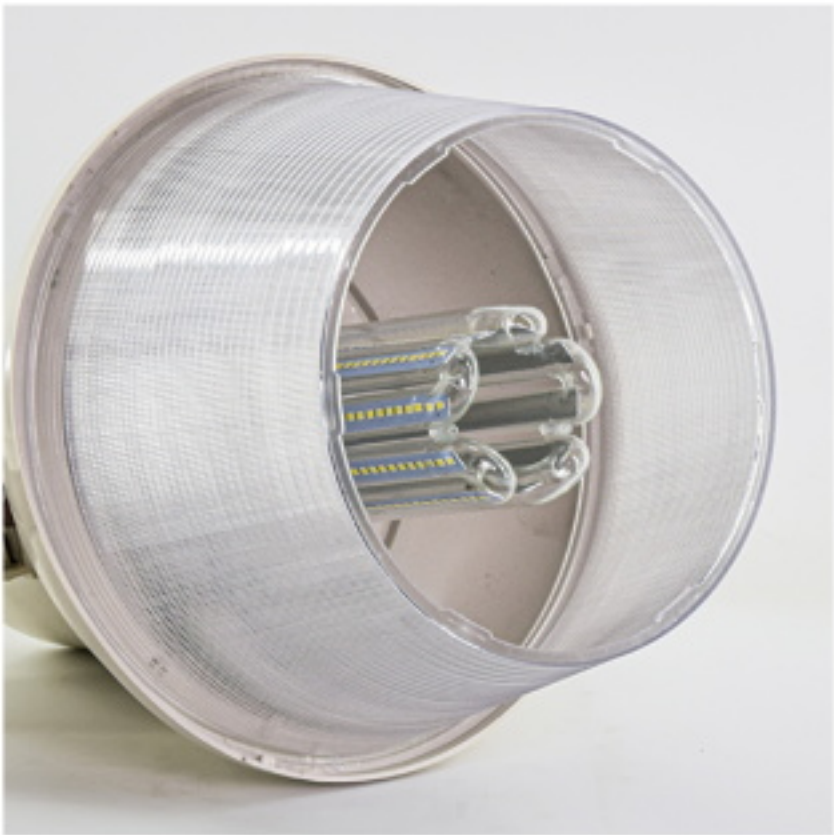

HF-175MA-C



HF-175MA




Mode	Power	Size(mm)	Voltage	Lamp Holder	Am Dia
HF-175PM 9"	65W	348*245*310	AC110-130V/AC220-240V	E27/E40	Φ38mm
HF-175PM 12"	105W	385*315*380			
HF-175MA-C 9"	65W	316*255*350			
HF-175MA-C 12"	65W	340*312*390			
HF-175MA 9"	E40 175W/E27 65W	330*255*420			
HF-175MA 12"	E40 175W/E27 65W	350*312*450			



HF-175MA LS



HF-175MA-L

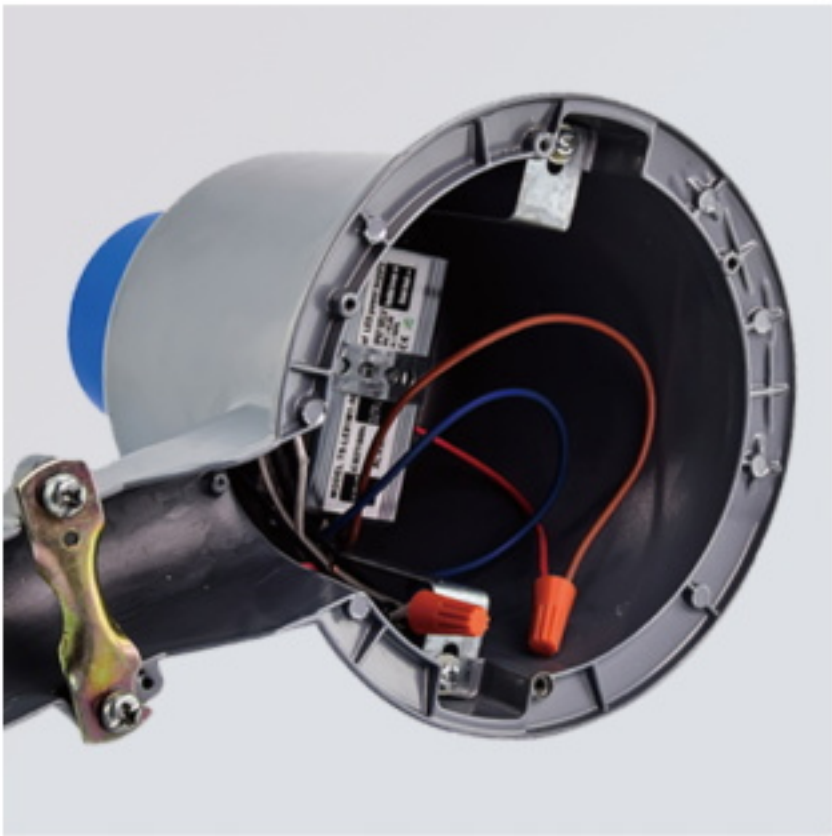


HF-175MH LED-C




Mode	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-175MA LS 5W	50W	350*350*535		130 °C	Ra>70	0.95	IP65
HF-175MA-L	30W	360*315*475	120lm/w	130 °C	Ra>70	0.95	IP65
	50W		110lm/w				
HF-175MH LED-C	50W	360*360*475	90lm/w	90°C	Ra>70	0.95	IP65




HF-175MH LED-B

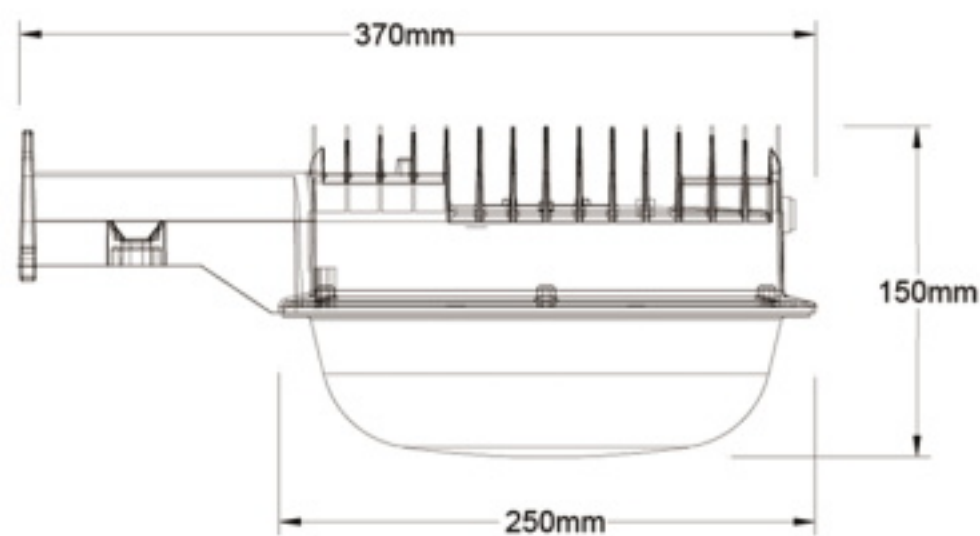


HF-175MH LED-F

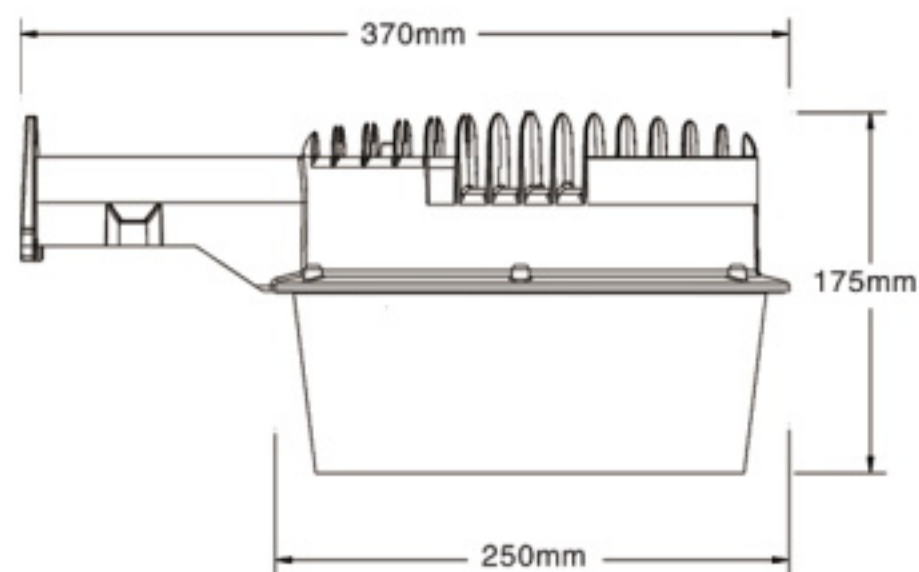

HF-175MH LED-B1

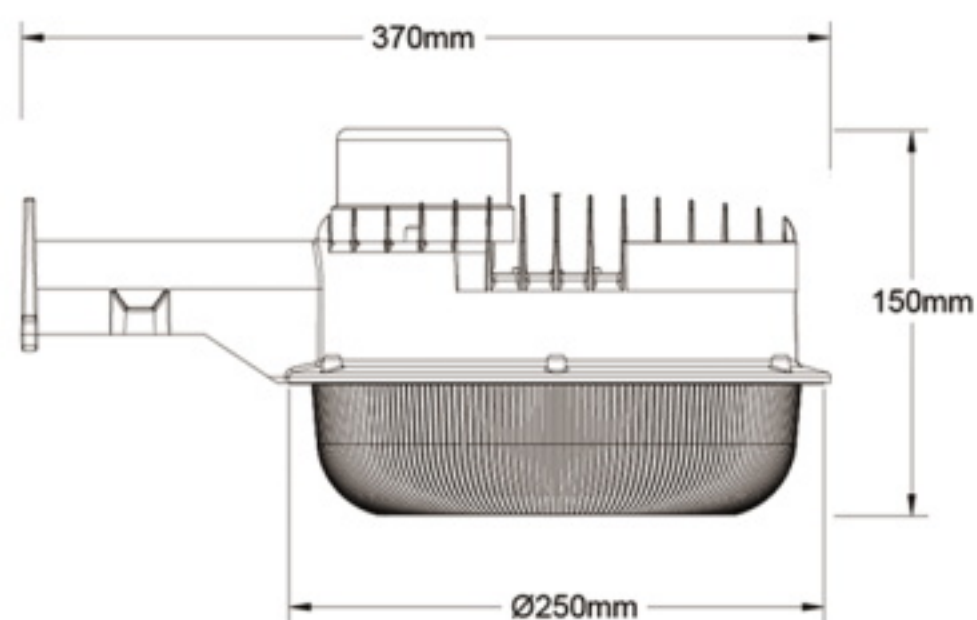


HF-175MH LED-G

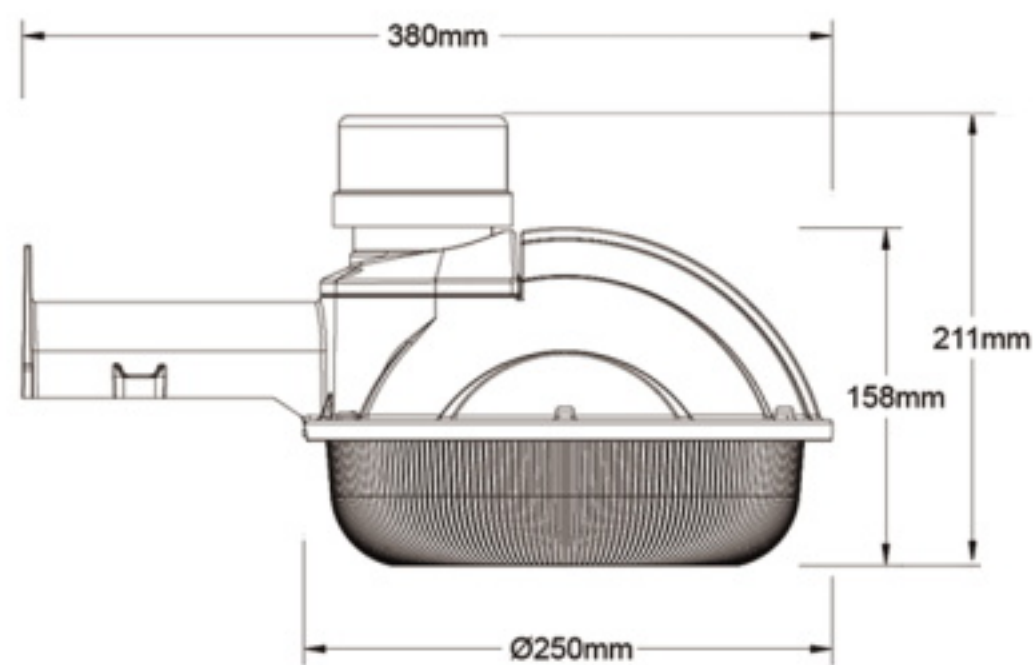

Model	HF-175MH LED-B	HF-175MH LED-F	HF-175MH LED-B1	HF-175MH LED-G
Lamp Power	50W	50W	50W	80W
Power Factor	0.9			
Voltage:	AC85-265V 50/60Hz			
Luminous Flux	100 lm/w	90 lm/w	85 lm/w	90 lm/w
Color Temperature	2700-6500K			
CRI	>75			
Operating Temperature	-40°C ~ 50°C			
Arm Dia.(mm)	Φ40			

HF-TG2108 Series

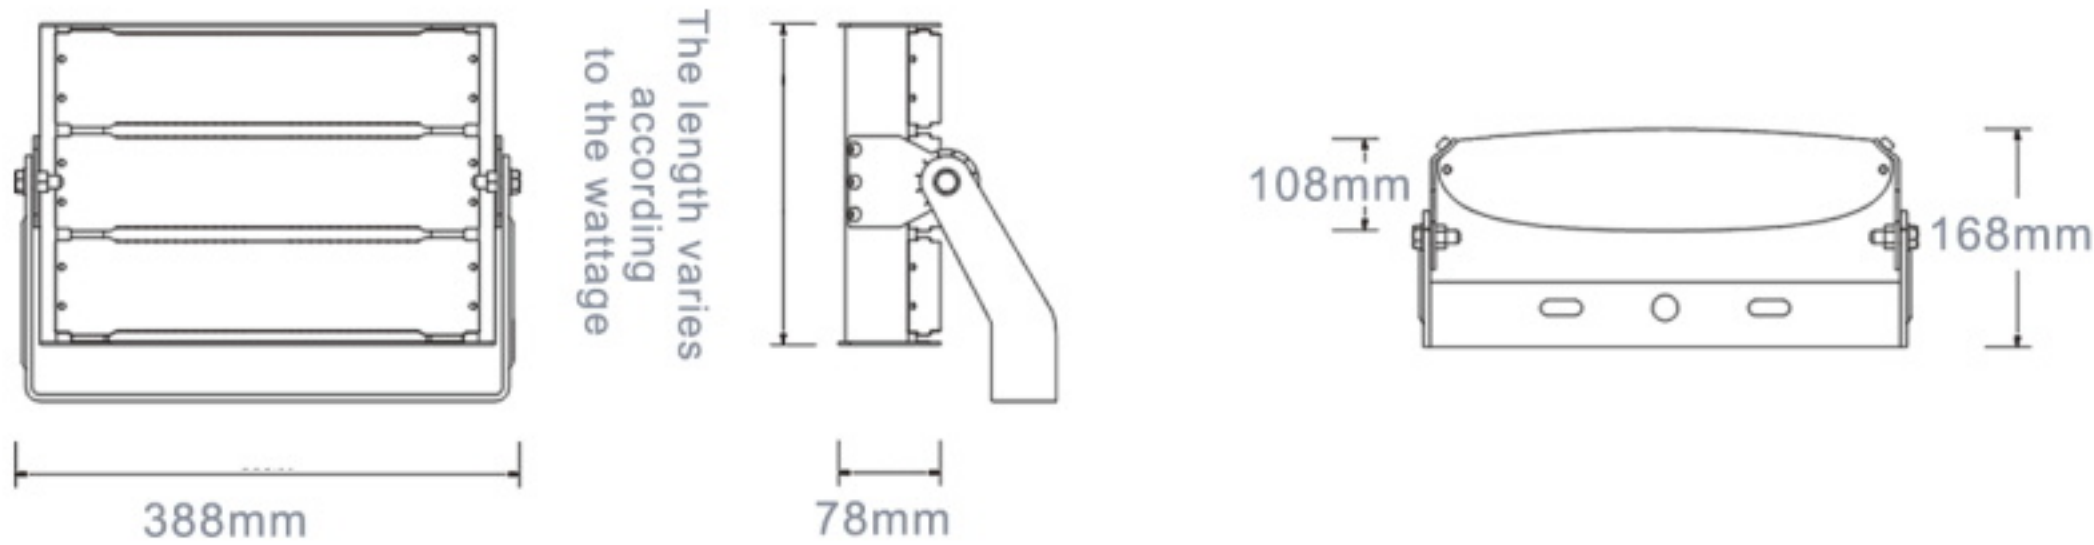

Model	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-TG2108-50	50W	210*388*108	130-150 lm/w	30°/60°/90°/70°140°	>70	0.95	IP65
HF-TG2108-100	100W	250*388*108					
HF-TG2108-150	150W	290*388*108					
HF-TG2108-200	200W	370*388*108					
HF-TG2108-250	250W	450*388*108					
HF-TG2108-300	300W	530*388*108					

HF-TG11Q Series



Mode	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor
HF-TG11Q-200	180W-200W	Φ367*H404	110-140 lm/w	60°/90°	>70	0.95
HF-TG11Q-300	240W-300W	Φ367*H453				
HF-TG11Q-400	320W-400W	Φ367*H456				
HF-TG11Q-500	400W-500W	Φ416*H496				
HF-TG11Q-600	480W-600W	Φ416*H496				

HF-FL1026



Model	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-FL1026	50W	225*140*252	80 lm/w	45°	>70	0.95	IP65

HF-DP
Series



3W

6W

9W

12W

15W

18W

24W

36W


Model	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-DP-7	5-7W	Φ125*62	130 lm/w	30°/60°/90°/120°	>70	0.95	IP65
HF-DP-12	9-12W	Φ155*60					
HF-DP-18	12-18W	Φ185*60					
HF-DP-24	18-24W	Φ205*60					
HF-DP-36	24-36	Φ235*60					

HF-PQ
Series



Model	Power	Size(mm)	Lumen	Luminous angle	CRI	Power Factor	IP Grade
HF-PQ-9	6-9W	Φ130*H85/IDΦ38	120 lm/w	30°/60°/90°/120°	>70	0.95	IP68
HF-PQ-12	9-12W	Φ160*H85 /IDΦ38					
HF-PQ-18	12-18W	Φ180*H85 /IDΦ50					
HF-PQ-24	18-24W	Φ200*H85/IDΦ60					



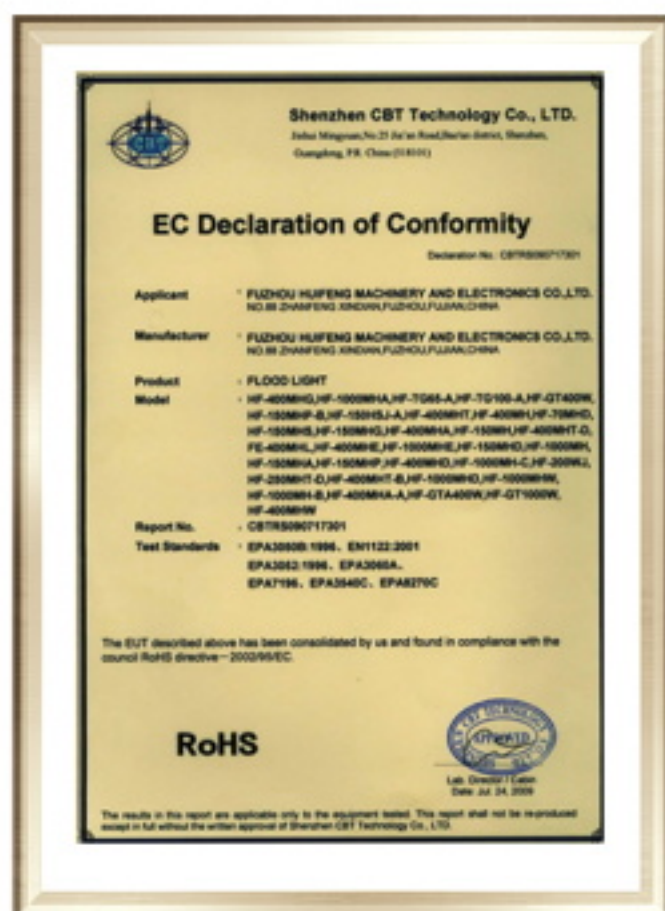

WE ARE YOUR RELIABLE PARTNER

